
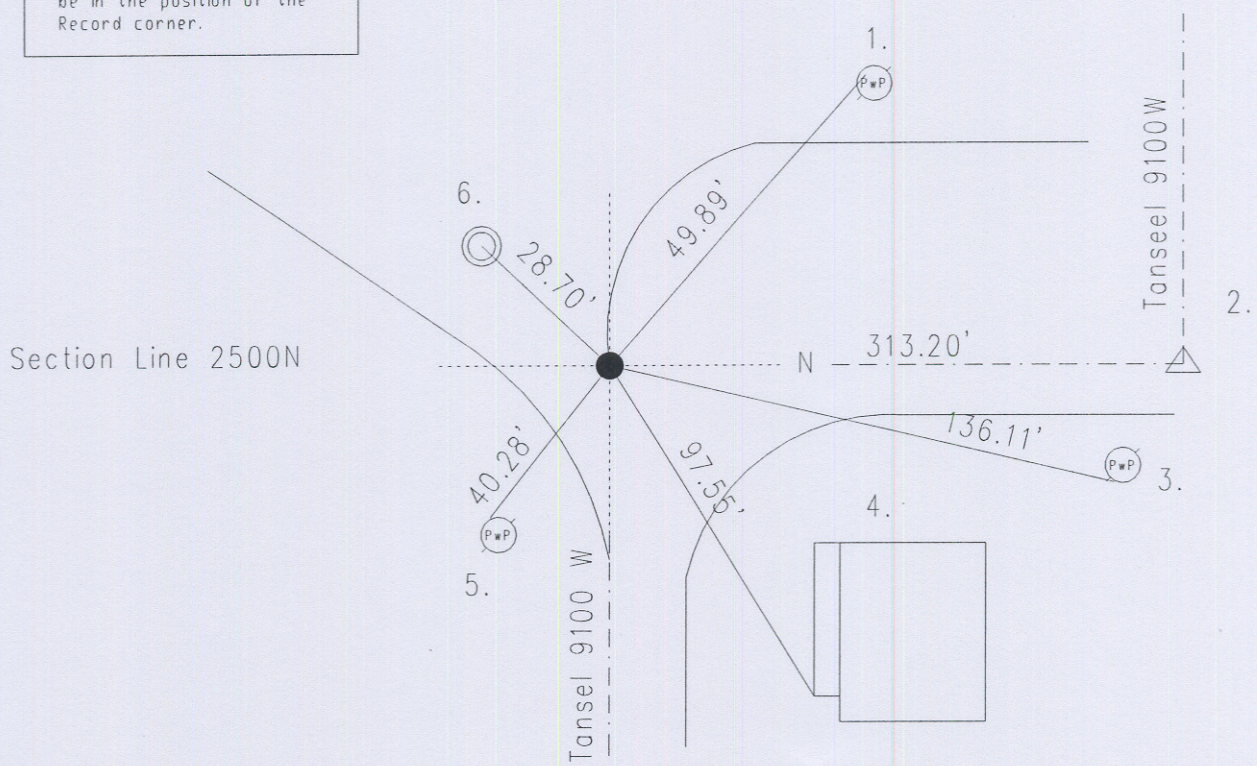


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 28 TOWNSHIP 16 RANGE 2
DATE: 10-20-08
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Survey mark nail set over
METHOD OF ESTABLISHMENT: County: 'x'
7-25-06

IN. S.P.C. E ZONE NAD '83
NAME: 160228A
N: 505596.2160(m)
E: 43775.2900(m)

NOTE: This corner position
represents a title corner
and may not necessarily
be in the position of the
Record corner.

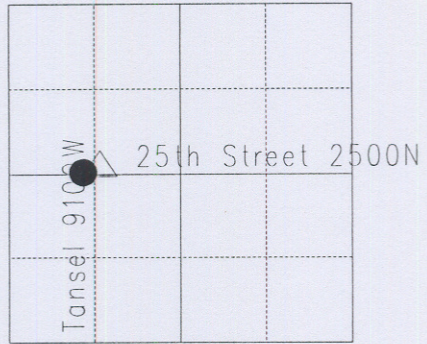

Corner History: Stone set 8-17-1852 by Hosbrook per Wayne Township Legal Survey Book pg. 16. Stone at surface dated 1944. Stone at surface 1985. Re-tied 7-25-06 by Wilcoxen. Re-tied 10-20-08 by Wilcoxen.

160228A

REF.	DISTANCE	DESCRIPTION
1.	49.89'	Mag nail w/washer N PwP#2460 6"up
2.	313.20'	Due F to N Q of SWQ 28-16-2 (survey mark nail)
3.	136.11'	PK nail S PwP#23-451WA 15"up
4.	97.55'	SW corner of brick porch
5.	40.28'	Mag nail w/washer W PwP#22-451WA 8"up
6.	28.70'	Cut 'x' in center of sewer manhole lid